
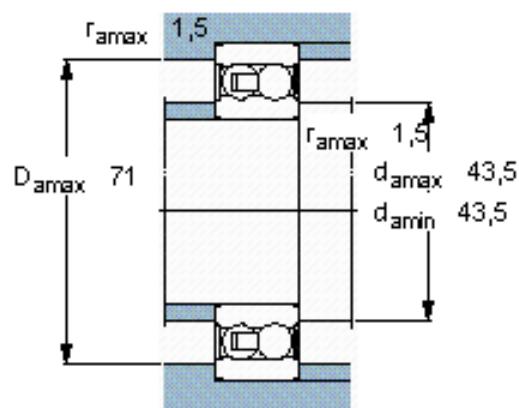


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	dynamic C	static C0	Pu	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
35	80	31	26,5	8,5	0,43	-	5600	0,7	2307 E-2RS1TN9

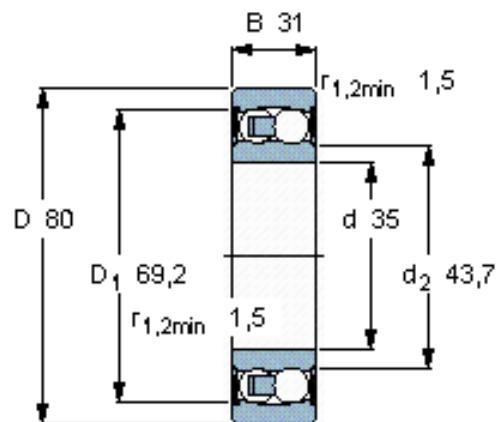

Calculation factors

e 0,25
Y₁ 2,5
Y₂ 3,9
Y₀ 2,5